


## Narrow Divergence VCSEL Array (60W) Part # NDVA-08-60-W0975

- Vertical-Cavity Surface-Emitting Laser technology
- Divergence angle of 8mrad full angle
- Micro-lens mounted
- Using external lens- the divergence can be reduced to 0.5mrad
- CW, Pulse and QCW operation
- Custom wavelengths available (808-1064nm)
- Applications– Illuminators, LIDARS, Beacons

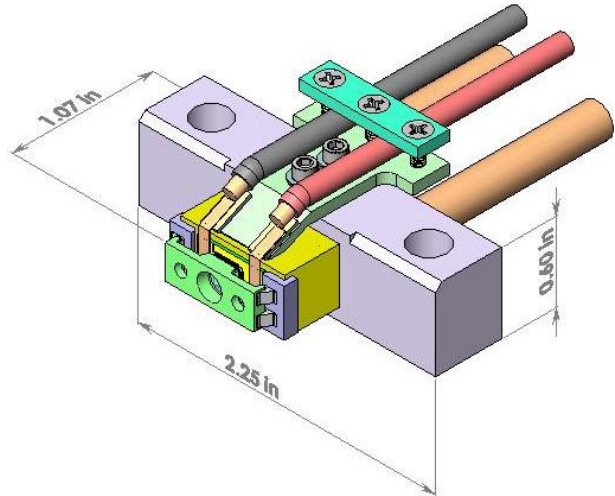

### Optical & Electrical Characteristics


PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
CW Output Power	140A, 25C Heat-sink	60	70	--	W
Threshold current	25C Heat-sink	--	15	20	A
Operating current	60W, 25C Heat-sink	--	120	140	A
Operating voltage	60W, 25C Heat-sink	--	2.2	3	V
Differential resistance	25C Heat-sink	--	15	18	mΩ
Center wavelength	60W, 25C Heat-sink	965	975	985	nm
Spectral width (FWHM)	60W, 25C Heat-sink	--	0.8	1	nm
Wavelength shift	25C Heat-sink	0.060	0.065	0.070	nm/°C
Divergence (full angle)	60W, 25C Heat-sink	--	8	10	mrad
Emission diameter	--	--	4.7	--	mm

Copyright © 2009 Princeton Optronics, Inc.  
All Rights Reserved.

Princeton Optronics reserves the right to change product design and specifications at any time without notice.

No license is granted by implication or otherwise under any patents or patent right of Princeton Optronics. No responsibility is assumed for the use of these products, nor for any infringement on the rights of others resulting from the use of these products

Laser diode product components are intended for use in a user-devised end system. However, these products are capable of emitting Class IV radiation. Extreme care must be exercised during their operation. Only persons familiar with the appropriate safety precautions should operate a laser product. Directly viewing the laser beam or exposure to specular reflections must be avoided. Serious injury may result if any part of the body is exposed to the beam. The eye is extremely sensitive to the infrared radiation and therefore, proper eye-wear must be worn at all times. Use of optical instruments with these products may increase eye hazard. Always wear eye protection when operating.



REV. A – 03/09

Princeton Optronics, Inc. \* 1 Electronics Drive \* Mercerville, New Jersey 08619

Voice: (609) 584-9696 \* Fax: (609) 584-2448 \* E-mail: sales@princetonoptronics.com \* www.princetonoptronics.com