


High Power Laser Illuminator

Key Features

- High power output 630W (Equivalent to 50,000 lumens)
- Brightness- 40,000 lumens/square meter at a distance of 50 meters
- Beam Divergence 8mR
- Center wavelength 976nm
- Narrow wavelength spread (10nm)
- Uses highly reliable Vertical Cavity Surface Emitting Laser technology
- Water cooled
- Reliable- field operable
- Dimensions: 21 x 17 x 19 in
- Weight: ~70 lbs
- Illuminators can be developed at 808 and 1064nm


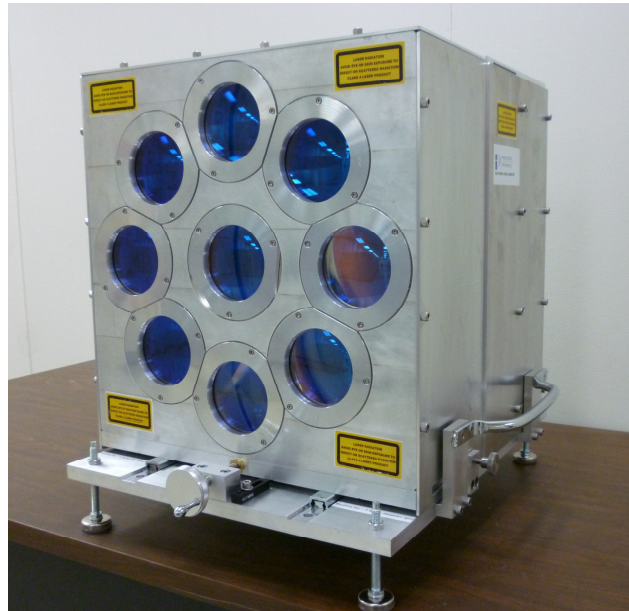


Applications

- High speed (million frames/sec) imaging through explosions by IEDs or shaped charge explosives
- For use with narrow band filters for background rejection.

Illumination Pattern vs Distance:

Individual beamlets are overlapped on each other to form the illumination pattern.

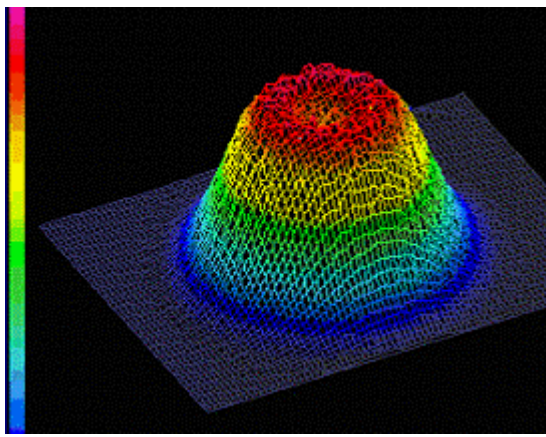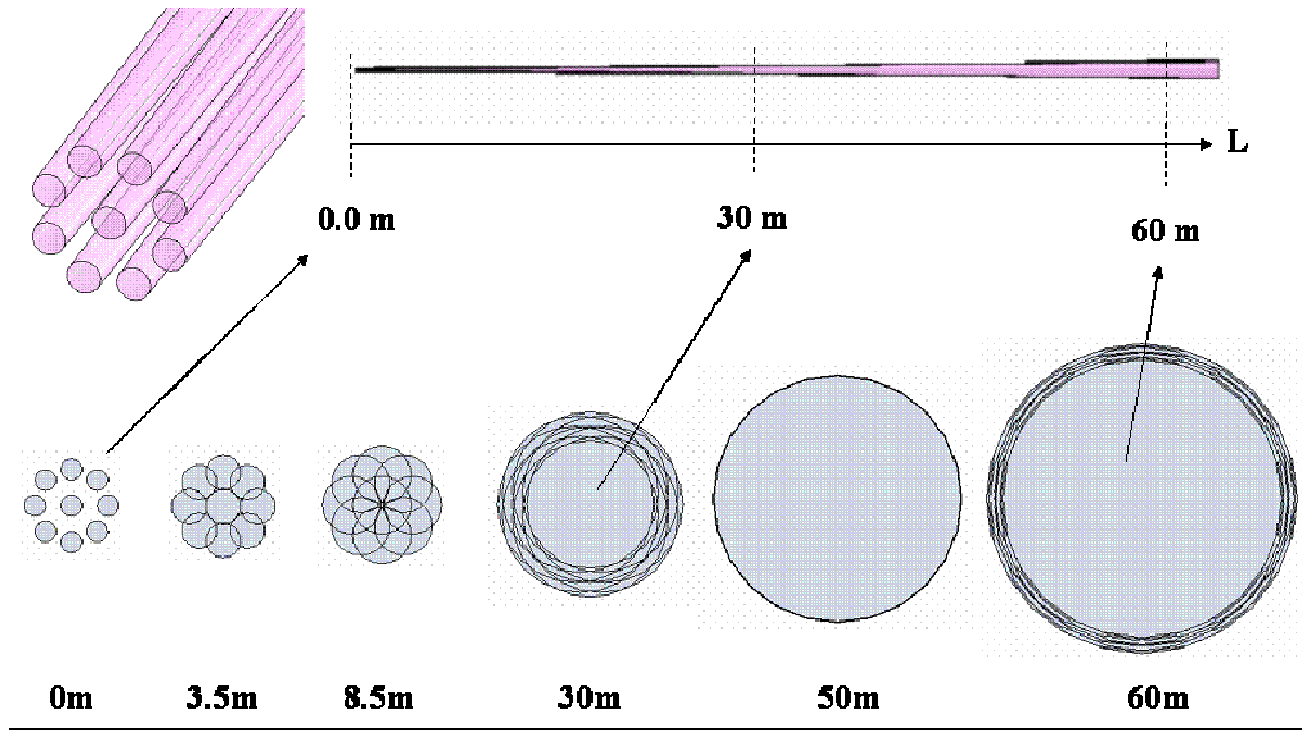

Beam profile- flattop

www.PRINCETONOPTRONICS.com

Corporate Address: 1 Electronics Drive, Mercerville, NJ 08619

Phone: 609-584-9696; Fax: 609-584-2448